

Welcome to

天立電子有限公司

Sky Power Co., Ltd.

- Address: No.67, Lane 71, Jiang-Nan St., NeiHu, Taipei, Taiwan,
- TEL: +886-2-26595576 ; FAX: +886-2-26598572

東莞市晟峰電子科技有限公司

Dongguan Shengfone Electronics Technology Co., Ltd

- Address: 3F, No.2, Xi-Ba St., KaoJi Rd., ChinXi Town,
- DongGuan City, GuanDong, China
- TEL: +86-769-82990510/2 ; FAX: +86-769-82990330
- www.skypowercom.net
- 聯絡人: Willy 13431322806 willy@skypowercom.com

1. Company Introduction

Establish: Aug, 2004 --- Factory Set-up
Dec, 2008 --- Taipei Office Set-up

Capital : NTD50 million

Total Floorage: 6,000 square meters


Location-1: Chin-Xi, Dong-Guan, Guan-Dong, China

Location-2: Taipei City, Taiwan

Total employee : 200 persons

Production capacity : 2K KPCS / month

2. Organization

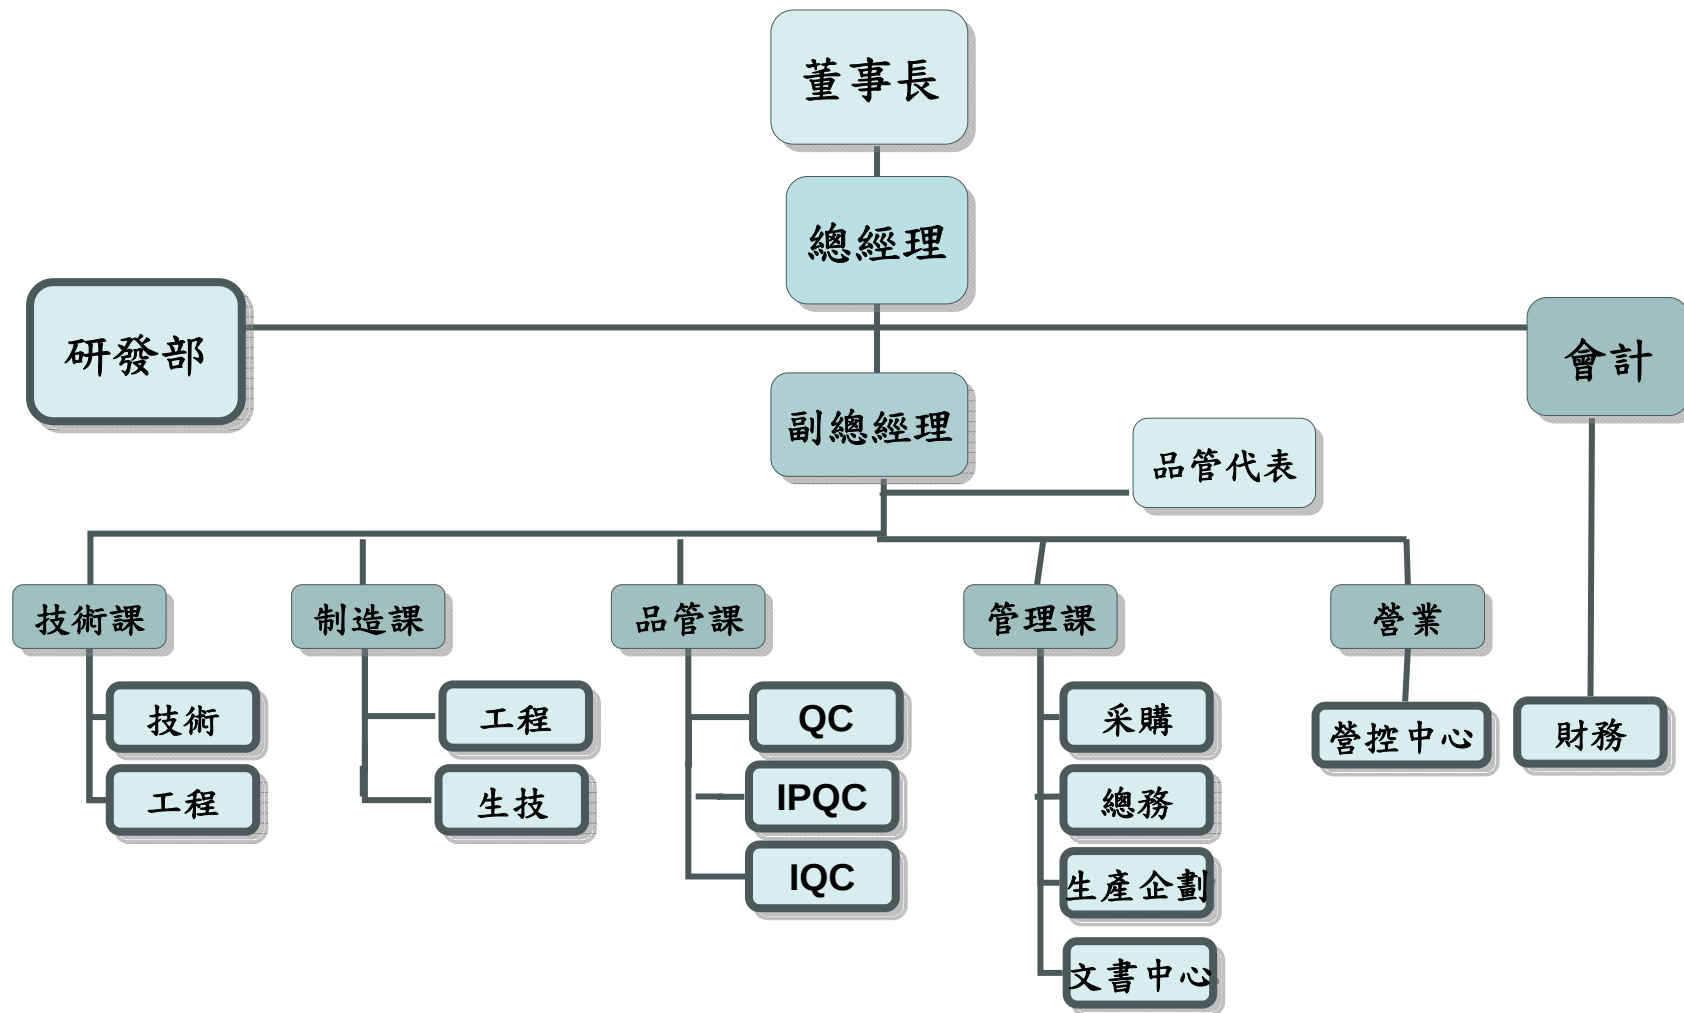

3. Production Facility

Pre-forming Line * 2

Insertion Line * 4

Lead-free wave machine * 4

Touch-Up Line * 4

Pre-testing facility * 4

Burn-in Room * 4

Auto-function-test system * 4

Packaging Line * 4



4. Test Equipment - Production

- In-circuit Tester
- Hi-Pot Tester
- Ground-Impedance Tester
- Electronic-Load Tester
- Burn-in Chamber
- Function Auto-Tester – FA828ATE
- Function Auto-Tester – Chroma6000



5. Test Equipment – Quality Engineering

- High and low temperature humidity chamber
- Ground-Impedance Tester
- Leakage-Current Tester
- Electronic-Load Tester
- EMI-Conducted Spectrum
- Aging Test Bench
- Hi-Pot Tester
- RoHS Tester
- LCR Meter



EMI Test Lab



6. Factory



7. Products -- Adapter 5 W

- **Model: BI05 series**
- **Input: 100 ~ 240 V-ac, 50 / 60Hz**
- **AC-input plug type: Wall-mount, US-plug / EU-plug,**
- **Output: 3 ~ 12 V-dc, 1 A max,**
- **DC-output plug: USB-build-in, mini-USB, or as customer specified,**
- **DC-output cable: 24AWGx2C, or as customer specified,**
- **Safety: UL, c-UL, FCC, CE, TUV, CB,,**
- **Size: 55mm (L) * 52mm (W) * 22mm (H)**
- **Features: CEC compliant**
- **Applications: Mobile-phone, PDA, MP3 / 4, various,**




7. Products -- Adapter 5 W

- Model: SSA051F series
- Input: 100 ~ 240 V-ac, 50 / 60Hz
- AC-input plug type: Wall-mount, US-plug / EU-plug / AU-plug / UK-plug,
- Output: 5 ~ 12 V-dc, 1 A max,
- DC-output plug: USB-build-in, mini-USB, or as customer specified,
- DC-output cable: 24AWGx2C, or as customer specified,
- Safety: UL, c-UL, FCC, CE, TUV, CB,,
- Size: 55mm(L) * 40mm(W) * 27mm(H)
- Features: CEC compliant
- Applications: Mobile-phone, PDA, MP3 / 4, various,



7. Products -- Adapter 6 W

- Model: PSA15-1xx series
- Input: 100 ~ 240 V-ac, 50 / 60Hz
- AC-input plug type: Wall-mount, US-plug / EU-plug,
- Output: 5 ~ 12 V-dc, 1 A max, 6W max,
- DC-output plug type: 5.5x2.1x9.5mm, or as customer specified,
- DC-output cable: 24AWGx2C, or as customer specified,
- Safety: UL, c-UL, FCC, CE, TUV, CB,,
- Size: 60mm(L) * 42mm(W) * 26mm(H)
- Features: CEC compliant
- Applications: Mobile-phone, PDA, MP3 / 4,

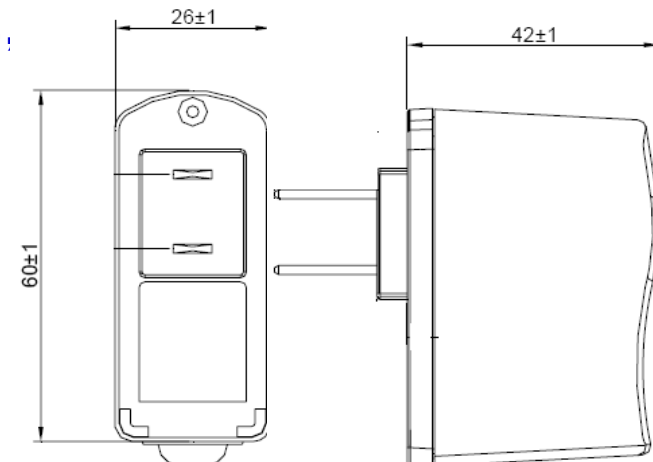

7. Products -- Adapter 7 W

- Model: BI07 –I series
- Input: 100 ~ 240 V-ac, 50 / 60Hz
- AC-input plug type: Inter-changeable Plug, US/EU/SA/UK,
- Output: 3 ~ 24 V-dc, 1.4 A max,
- DC-output plug type: 5.5x2.1x9.5mm, or as customer specified,
- DC-output cable: 22AWGx2C, or as customer specified,
- Safety: UL, c-UL, FCC, CE, TUV, CB,,
- Size: 59mm(L) * 26mm(W) * 43mm(H)
- Features: AC-plug-changeable
- Application: Hub, Modem, various,




7. Products -- Adapter 7 W

- Model: BI07 series
- Input: 100 ~ 240 V-ac, 50 / 60Hz
- AC-input plug type: Wall-mount Plug, US/EU/SA/UK,
- Output: 3 ~ 24 V-dc, 1.4 A max,
- DC-output plug type: 5.5x2.1x9.5mm, or as customer specified,
- DC-output cable: 22AWGx2C, or as customer specified,
- Safety: UL, c-UL, FCC, CE, TUV, CB,,
- Size: 60mm(L) * 44mm(W) * 30mm(H)
- Features: compact-size, low-output wattage adapter,
- Application: various,



7. Products -- Adapter 10 W

- Model: PSA15-xy series
- Input: 100 ~ 240 V-ac, 50 / 60Hz
- AC-input plug type: Wall-mount, US-plug / EU-plug,
- Output: 5 ~ 12 V-dc, 2 A max, 10W max,
- DC-output plug type: 5.5x2.1x9.5mm, or as customer specified,
- DC-output cable: 22AWGx2C, or as customer specified,
- Safety: UL, c-UL, FCC, CE, TUV, CB,,
- Size: 60mm(L) * 42mm(W) * 26mm(H)
- Features: CEC compliant
- Applications: Hub, Modem, PDA, MP3 / 4, various

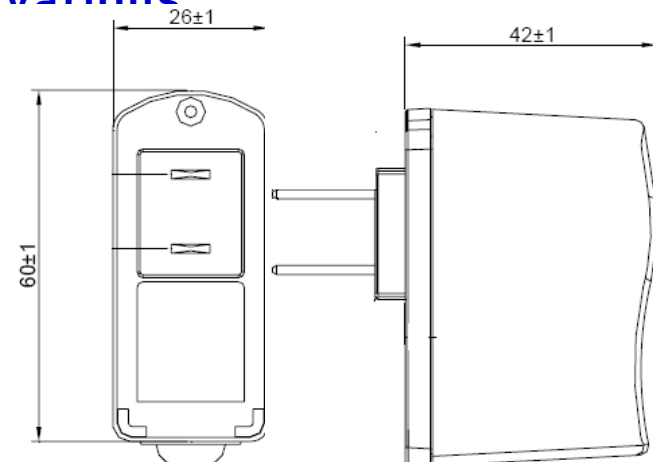

7. Products -- Adapter 13 W

- **Model: BI13 –I series**
- **Input: 100 ~ 240 V-ac, 50 / 60Hz**
- **AC-input plug type: Inter-changeable Plug, US / EU / SA / UK,**
- **Output: 3 ~ 24 V-dc, 2 A max,**
- **DC-output plug type: 5.5x2.1x9.5mm, or as customer specified,**
- **DC-output cable: 20AWGx2C, or as customer specified,**
- **Safety: UL, c-UL, FCC, CE, TUV, CB, SAA, C-tick, PSE,**
- **Size: 59mm(L) * 26mm(W) * 43mm(H)**
- **Features: AC-plug-changeable**
- **Application: Hub, Modem, various,**




7. Products -- Adapter 13 W

- **Model: BI13 series**
- **Input: 100 ~ 240 V-ac, 50 / 60Hz**
- **AC-input plug type: Wall-mount Plug, US/EU/SA/UK,**
- **Output: 3 ~ 24 V-dc, 2 A max,**
- **DC-output plug type: 5.5x2.1x9.5mm, or as customer specified,**
- **DC-output cable: 20AWGx2C, or as customer specified,**
- **Safety: UL, c-UL, FCC, CE, TUV, CB, SAA, C-tick, PSE,**
- **Size: 59mm(L) * 26mm(W) * 43mm(H)**
- **Features: compact-size, low-output wattage adapter,**
- **Application: Hub, Modem, various,**



7. Products -- Adapter 15 W

- Model: PSA15-xz series
- Input: 100 ~ 240 V-ac, 50 / 60Hz
- AC-input plug type: Wall-mount, US-plug / EU-plug,
- Output: 5 ~ 12 V-dc, 2.5 A max, 15W max,
- DC-output plug type: 5.5x2.1x9.5mm, or as customer specified,
- DC-output cable: 20AWGx2C, or as customer specified,
- Safety: UL, c-UL, FCC, CE, TUV, CB,,
- Size: 60mm(L) * 42mm(W) * 26mm(H)
- Features: CEC compliant
- Applications: Hub, Modem, PDA, MP3 / 4, various,

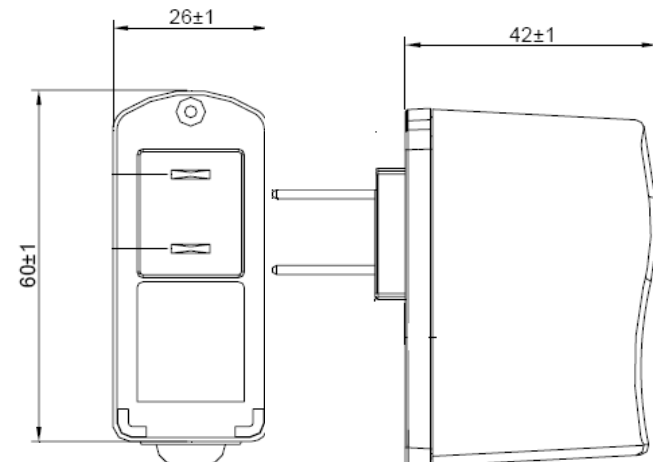

7. Products -- Adapter 20 W

- Model: BI20 –I series
- Input: 100 ~ 240 V-ac, 50 / 60Hz
- AC-input plug type: Inter-changeable Plug, US / EU / SA / UK,
- Output: 3 ~ 24 V-dc, 3.5 A max,
- DC-output plug type: 5.5x2.1x9.5mm, or as customer specified,
- DC-output cable: 20AWGx2C, or as customer specified,
- Safety: UL, c-UL, FCC, CE, TUV, CB, SAA, C-tick, PSE,
- Size: 59mm(L) * 26mm(W) * 43mm(H)
- Features: AC-plug-changeable
- Application: various,



7. Products -- Adapter 20 W

- **Model: BI20 series**
- **Input: 100 ~ 240 V-ac, 50 / 60Hz**
- **AC-input plug type: Wall-Mount Plug, US/EU/SA/UK,**
- **Output: 3 ~ 24 V-dc, 3.5 A max,**
- **DC-output plug type: 5.5x2.1x9.5mm, or as customer specified,**
- **DC-output cable: 20AWGx2C, or as customer specified,**
- **Safety: UL, c-UL, FCC, CE, TUV, CB, SAA, C-tick, PSE,**
- **Size: 59mm(L) * 26mm(W) * 43mm(H)**
- **Features: compact-size, low-output wattage adapter,**
- **Application: various,**



7. Products -- Adapter 25 W

- Model: BI25 series
- Input: 100 ~ 240 V-ac, 50 / 60Hz
- AC-input plug type: Wall-Mount Plug, US / EU / SA / UK,
• or Desk-Top type, IEC320-C6 / C8 inlet,
- Output: 3 ~ 24 V-dc, 4.0 A max,
- DC-output plug type: 5.5x2.1x9.5mm, or as customer specified,
- DC-output cable: 18AWGx2C, or as customer specified,
- Safety: UL, c-UL, FCC, CE, TUV, CB, SAA, C-tick, PSE,
- Size: 59mm(L) * 26mm(W) * 43mm(H)
- Features: compact-size adapter,
- Application: various,



7. Products -- Adapter 30 W

- **Model: BI30 –I series**
- **Input: 100 ~ 240 V-ac, 50 / 60Hz**
- **AC-input plug type: Inter-changeable Plug, US/EU/SA/UK,**
- **Output: 5 ~ 24 V-dc, 4.0 A max,**
- **DC-output plug type: 5.5x2.1x9.5mm, or as customer specified,**
- **DC-output cable: 18AWGx2C, or as customer specified,**
- **Safety: UL, c-UL, FCC, CE, TUV, CB, SAA, C-tick, PSE,**
- **Size: 59mm(L) * 26mm(W) * 43mm(H)**
- **Features: AC-plug-changeable**
- **Application: various,**



7. Products -- Adapter 30 W

- **Model: BI30 series**
- **Input: 100 ~ 240 V-ac, 50 / 60Hz**
- **AC-input plug type: Wall-mount Plug, US/EU/SA/UK,**
- **Output: 5 ~ 24 V-dc, 4.0 A max,**
- **DC-output plug type: 5.5x2.1x9.5mm, or as customer specified,**
- **DC-output cable: 18AWGx2C, or as customer specified,**
- **Safety: UL, c-UL, FCC, CE, TUV, CB, SAA, C-tick, PSE,**
- **Size: 59mm(L) * 26mm(W) * 43mm(H)**
- **Features: Compact size adapter**
- **Application: various,**



7. Products -- Adapter 30 W

- Model: PSA30 series
- Input: 100 ~ 240 V-ac, 50 / 60Hz
- AC-input plug type: Desk-Top, IEC320-C6 / C8 inlet,
- Output: 3.3 ~ 24 V-dc, 6.0 A max, 30 W max,
- DC-output plug type: 5.5x2.1x9.5mm, or as customer specified,
- DC-output cable: 18AWGx2C, or as customer specified,
- Safety: UL, c-UL, FCC, CE, TUV, CB,,
- Size: 101mm(L)*50mm(W)*34mm(H)
- Features: Standard adapter
- Application: LCD-monitor, Notebook-PC, Printer, various,



7. Products -- Adapter 36 W

- Model: PSA36 series
- Input: 100 ~ 240 V-ac, 50 / 60Hz
- AC-input plug type: Desk-Top, IEC320-C6 / C8 / C14 inlet,
- Output: 3.3 ~ 24 V-dc, 6.0 A max, 36 W max,
- DC-output plug type: 5.5x2.1x9.5mm, or as customer specified,
- DC-output cable: 18AWGx2C, or as customer specified,
- Safety: UL, c-UL, FCC, CE, TUV, CB,,
- Size: 101mm(L) * 50mm(W) * 34mm(H)
- Features: Standard adapter
- Application: LCD-monitor, Notebook-PC, Printer, various,



7. Products -- Adapter 48 W

- **Model: PSA48 series**
- **Input: 100 ~ 240 V-ac, 50 / 60Hz**
- **AC-input plug type: Desk-Top, IEC320-C6 / C8 / C14 inlet,**
- **Output: 3.3 ~ 55 V-dc, 9.0 A max, 48 W max,**
- **DC-output plug type: 5.5x2.1x9.5mm, or as customer specified,**
- **DC-output cable: 18AWGx2C, or as customer specified,**
- **Safety: UL, c-UL, FCC, CE, TUV, CB,,**
- **Size: 59mm(L) * 26mm(W) * 43mm(H)**
- **Features: Standard adapter**
- **Application: LCD-monitor, Notebook-PC, Printer, various,**



7. Products -- Adapter 60 W

- **Model: PSA60 series**
- **Input: 100 ~ 240 V-ac, 50 / 60Hz**
- **AC-input plug type: Desk-Top, IEC320-C6 / C8 / C14 inlet,**
- **Output: 5 ~ 55 V-dc, 6.0 A max, 60 W max,**
- **DC-output plug type: 5.5x2.1x9.5mm, or as customer specified,**
- **DC-output cable: 18AWGx2C, or as customer specified,**
- **Safety: UL, c-UL, FCC, CE, TUV, CB,,**
- **Size: 110mm(L)*51mm(W)*37mm(H)**
- **Features: Standard adapter**
- **Application: LCD-TV / monitor, Notebook-PC, Printer, various,**



7. Products -- Adapter 65 W

- **Model: NA6501WB**
- **Input: 100 ~ 240 V-ac, 50 / 60Hz**
- **AC-input plug type: Desk-Top, IEC320-C6 / C8 inlet,**
- **Output: 19 V-dc, 3.42 A max, 65 W max,**
- **DC-output plug type: 5.5x2.1x9.5mm, or as customer specified,**
- **DC-output cable: 18AWGx2C, or as customer specified,**
- **Safety: UL, c-UL, FCC, CE, TUV, CB,,**
- **Size: 106mm(L) * 46mm(W) * 30mm(H)**
- **Features: Standard adapter**
- **Application: LCD-TV / monitor, Notebook-PC, Printer, various,**



7. Products -- Adapter 90 W

- **Model: NA9002WB**
- **Input: 100 ~ 240 V-ac, 50 / 60Hz**
- **AC-input plug type: Desk-Top, IEC320-C6 inlet,**
- **Output: 19 V-dc, 4.74 A max, 90 W max,**
- **DC-output plug type: 5.5x2.1x9.5mm, or as customer specified,**
- **DC-output cable: 16AWGx2C, or as customer specified,**
- **Safety: UL, c-UL, FCC, CE, TUV, CB,**
- **Size: 130mm(L)*55mm(W)*30mm(H)**
- **Features: Standard adapter**
- **Application: LCD-TV / monitor, Notebook-PC, Printer, various,**



7. Products -- Adapter 100 W

- Model: PSA100 series
- Input: 100 ~ 240 V-ac, 50 / 60Hz
- AC-input plug type: Desk-Top, IEC320-C6 / C14 inlet,
- Output: 12 ~ 24 V-dc, 8.0 A max, 100 W max,
- DC-output plug type: 5.5x2.1x9.5mm, or as customer specified,
- DC-output cable: 16AWGx2C, or as customer specified,
- Safety: UL, c-UL, FCC, CE, TUV, CB,
- Size: 142mm(L) * 60mm(W) * 38mm(H)
- Features: Standard adapter
- Application: LCD-TV / monitor, Notebook-PC, Printer, various,



7. Products -- Adapter – Car 5 W

- **Model: SPCD-5W series**
- **Input: 12 ~ 24 V-dc,**
- **DC-input plug type: Car-cigar-head,**
- **Output: 5 V-dc, 1.0 A max, 5 W max,**
- **DC-output plug type: mini-US, or USB, or as customer specified,**
- **DC-output cable: 24AWGx2C, or as customer specified,**
- **Size: 88mm(L) * 38mm(W) * 28mm(H)**
- **Features: Car adapter**
- **Application: Mobile-phone, GPS, various,**



7. Products -- Adapter – Car 10 W

- **Model: SPCD-10W series**
- **Input: 12 ~ 24 V-dc,**
- **DC-input plug type: Car-cigar-head,**
- **Output: 5 V-dc, 2.0 A max, 10 W max,**
- **DC-output plug type: mini-US, or USB, or as customer specified,**
- **DC-output cable: 22AWGx2C, or as customer specified,**
- **Size: 88mm(L) * 38mm(W) * 28mm(H)**
- **Features: Car adapter**
- **Application: Mobile-phone, GPS, various,**



7. Products -- Adapter – Car 40 W

- **Model: SPCD-40W series**
- **Input: 12 ~ 24 V-dc,**
- **DC-input plug type: Car-cigar-head,**
- **Output: 12 ~ 20 V-dc, 3.3 A max, 40 W max,**
- **DC-output plug type: 5.5x2.1x9.5mm, or as customer specified,**
- **DC-output cable: 18AWGx2C, or as customer specified,**
- **Size: 85mm(L) * 57mm(W) * 32mm(H)**
- **Features: Car adapter**
- **Application: Notebook-PC, various,**




7. Products -- Adapter – Car 90 W

- **Model: SPCD-90W series**
- **Input: 12 ~ 24 V-dc,**
- **DC-input plug type: Car-cigar-head,**
- **Output: 19 V-dc, 4.74 A max, 90 W max,**
- **DC-output plug type: 5.5x2.5x9.5mm, or as customer specified,**
- **DC-output cable: 16AWGx2C, or as customer specified,**
- **Size: 142mm(L) * 60mm(W) * 38mm(H)**
- **Features: Car adapter**
- **Application: Notebook-PC, various,**




7. Products -- Open-Frame 7 W

- Model: SPCO-7W series
- Input: 100 ~ 240 V-ac, 50 / 60Hz
- AC-input plug type: Inlet-IEC320-C6, or Wafer 2-pins 7.92mm,
- Output: 3.3 ~ 12 V-dc, 2.0 A max, 7W max,
- DC-output plug type: Wafer-4-pins 2.5mm, or as customer specified,
- DC-output cable: NA, or as customer specified,
- Safety: Comply UL, c-UL, GS, CE,
- Size: 75mm(L) * 34mm(W) * 23mm(H)
- Features: Compact size power supply,
- Application: Hub, Modem, various,

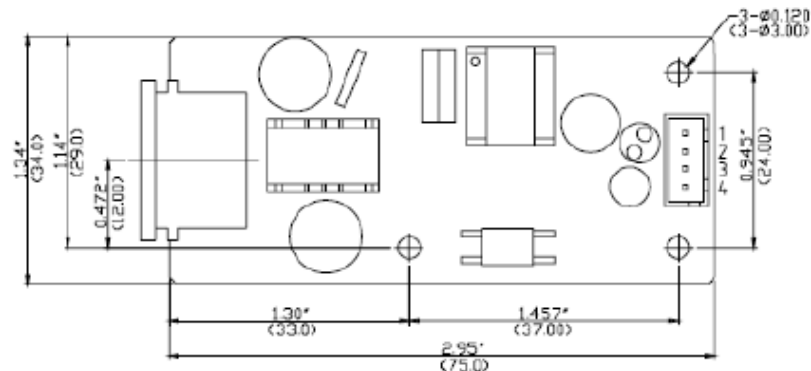


7. Products -- Open-Frame 9 W

- **Model: SPCO-9W series**
- **Input: 100 ~ 240 V-ac, 50 / 60Hz**
- **AC-input plug type: Wafer 2-pins 7.92mm,**
- **Output: 3.3 ~ 12 V-dc, 2.5 A max, 9 W max,,**
- **DC-output plug type: Wafer-4-pins 2.5mm, or as customer specified,**
- **DC-output cable: NA, or as customer specified,**
- **Safety: Comply UL, c-UL, GS, CE,**
- **Size: 60mm(L) * 42mm(W) * 23mm(H)**
- **Features: Compact size power supply,**
- **Application: Hub, Modem, various,**

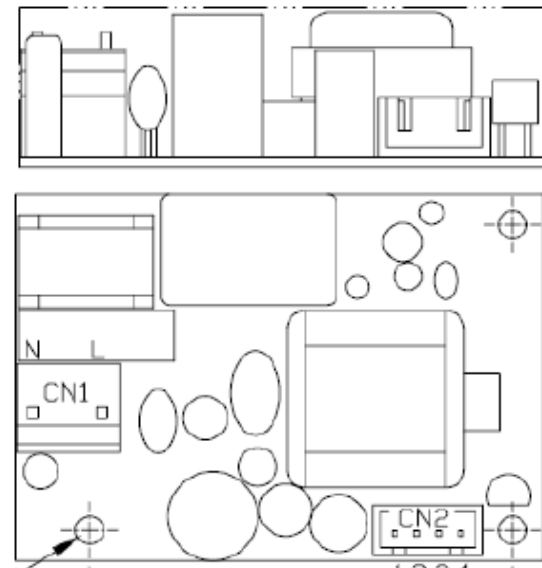



7. Products -- Open-Frame 15 W

- Model: PRO-15 series
- Input: 100 ~ 240 V-ac, 50 / 60Hz
- AC-input plug type: Wafer 2-pins 7.92mm,
- Output: 3.3 ~ 24 V-dc, 4.0 A max, 15 W max,,
- DC-output plug type: Wafer-4-pins 2.5mm, or as customer specified,
- DC-output cable: NA, or as customer specified,
- Safety: Comply UL, c-UL, GS, CE,
- Size: 75mm(L) * 48mm(W) * 32mm(H)
- Features: Compact size power supply,
- Application: Hub, Modem, various,

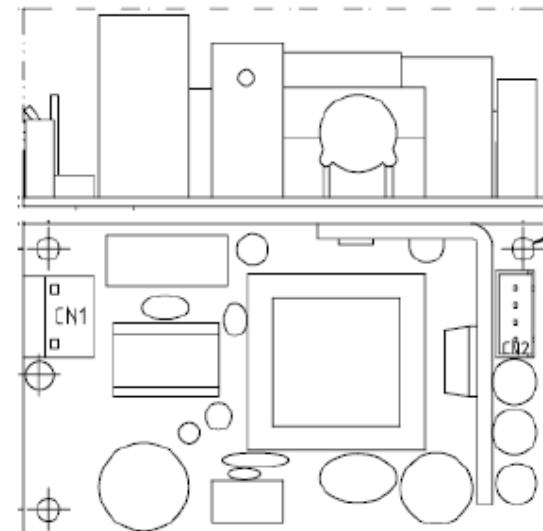



7. Products -- Open-Frame 30 W

- Model: PRO30 series
- Input: 100 ~ 240 V-ac, 50 / 60Hz
- AC-input plug type: Wafer 2-pins 7.92mm,
- Output: 3.3 ~ 24 V-dc , 6.0 A max, 30 W max,
- DC-output plug type: Wafer-4-pins 3.96mm,,
- DC-output cable: NA, or as customer specified,
- Safety: Comply UL, c-UL, GS, CE,
- Size: 50.8mm(L) * 101.6mm(W) * 32mm(H) , (2" * 4" * 1.25")
- Features: Compact size power supply,
- Application: Hub, Printer, various,

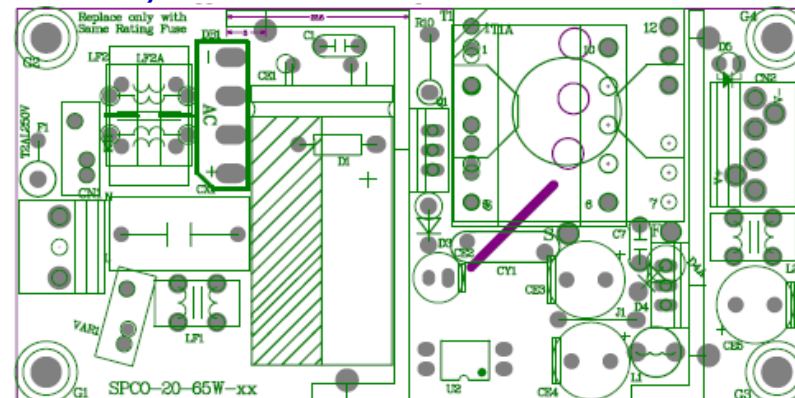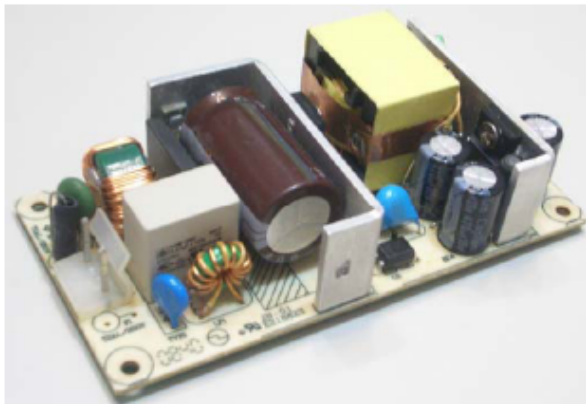



7. Products -- Open-Frame 36 W

- Model: PRO36 series
- Input: 100 ~ 240 V-ac, 50 / 60Hz
- AC-input plug type: Wafer 2-pins 7.92mm,
- Output: 5.0 ~ 24 V-dc , 7.0 A max, 36 W max,
- DC-output plug type: Wafer-4-pins 3.96mm,,
- DC-output cable: NA, or as customer specified,
- Safety: Comply UL, c-UL, GS, CE,
- Size: 50.8mm(L) * 101.6mm(W) * 32mm(H) , (2" * 4" * 1.25")
- Features: Compact size power supply,
- Application: Hub, Printer, various,

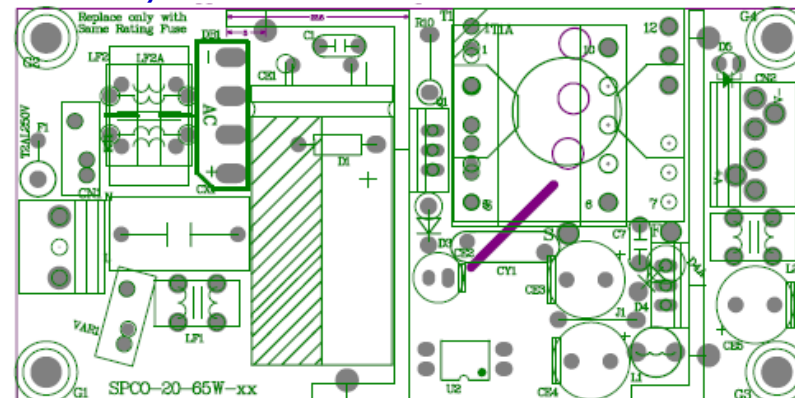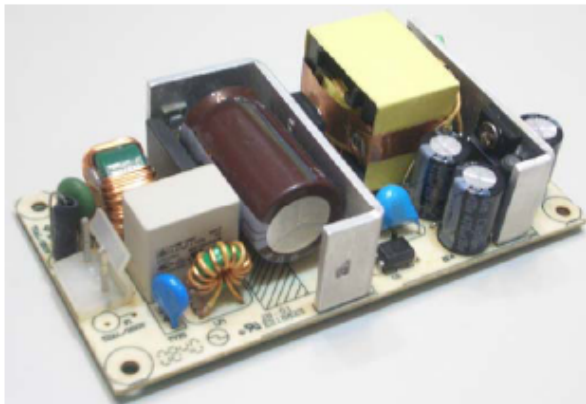



7. Products -- Open-Frame 48 W

- **Model: PRO48 series**
- **Input: 100 ~ 240 V-ac, 50 / 60Hz**
- **AC-input plug type: Wafer 2-pins 7.92mm,**
- **Output: 12 ~ 48 V-dc , 4.0 A max, 48 W max,**
- **DC-output plug type: Wafer-4-pins 3.96mm,,**
- **DC-output cable: NA, or as customer specified,**
- **Safety: Comply UL, c-UL, GS, CE,**
- **Size: 50.8mm(L)*101.6mm(W)*32mm(H) , (2"*4"*1.25")**
- **Features: Compact size power supply,**
- **Application: Hub, Printer, various,**

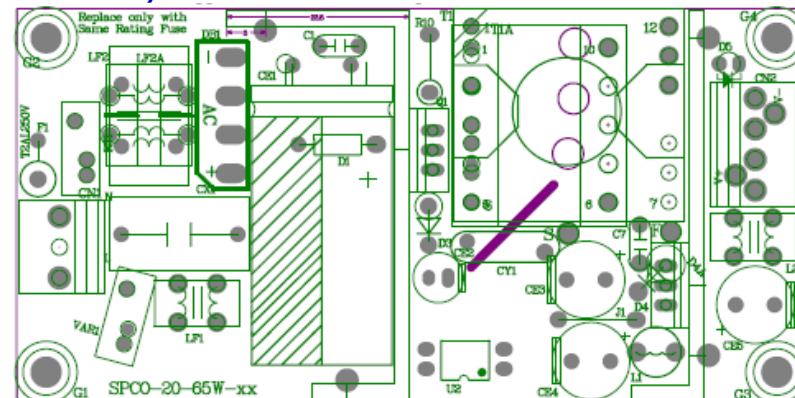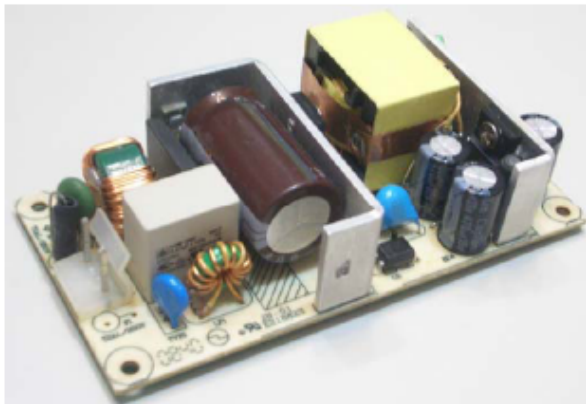



7. Products -- Open-Frame 60 W

- Model: PRO60 series
- Input: 100 ~ 240 V-ac, 50 / 60Hz
- AC-input plug type: Wafer 2-pins 7.92mm,
- Output: 12 ~ 48 V-dc , 5.0 A max, 60 W max,
- DC-output plug type: Wafer-4-pins 3.96mm,,
- DC-output cable: NA, or as customer specified,
- Safety: Comply UL, c-UL, GS, CE,
- Size: 50.8mm(L) * 101.6mm(W) * 32mm(H) , (2" * 4" * 1.25")
- Features: Compact size power supply,
- Application: Hub, Printer, various,

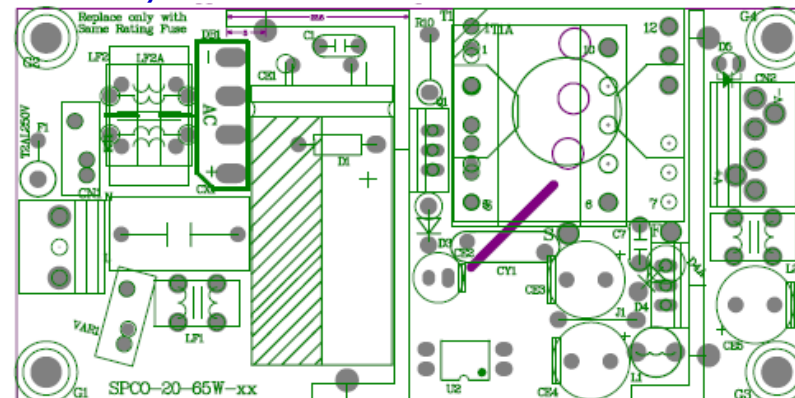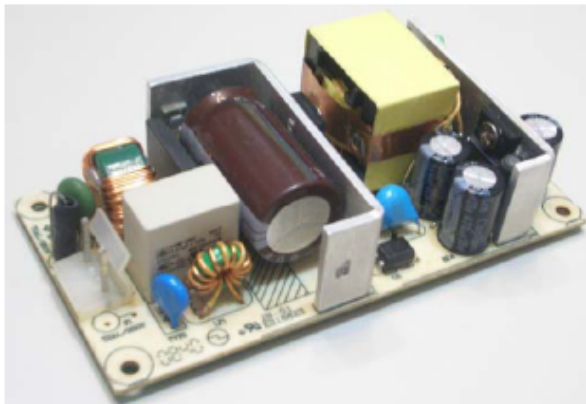


7. Products -- Open-Frame 65 W

- Model: SPCO-65W series
- Input: 100 ~ 240 V-ac, 50 / 60Hz
- AC-input plug type: Wafer 2-pins 7.92mm,
- Output: 24 ~ 48 V-dc , 2.7 A max, 65 W max,
- DC-output plug type: Wafer-4-pins 3.96mm,,
- DC-output cable: NA, or as customer specified,
- Safety: Comply UL, c-UL, GS, CE,
- Size: 50.8mm(L) * 101.6mm(W) * 32mm(H) , (2" * 4" * 1.25")
- Features: Compact size power supply,
- Application: Hub, Printer, various,

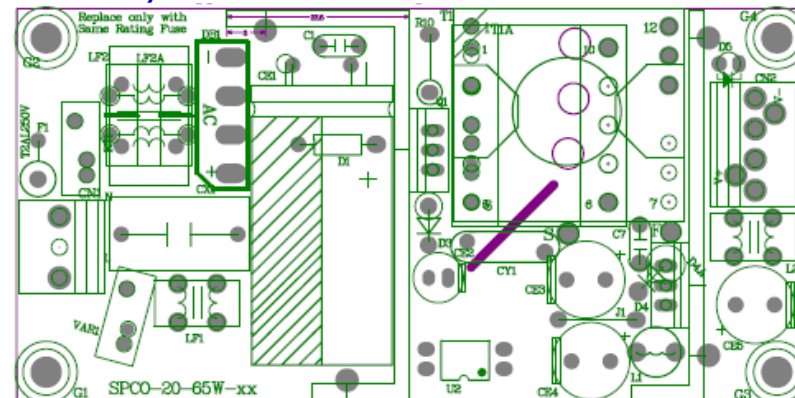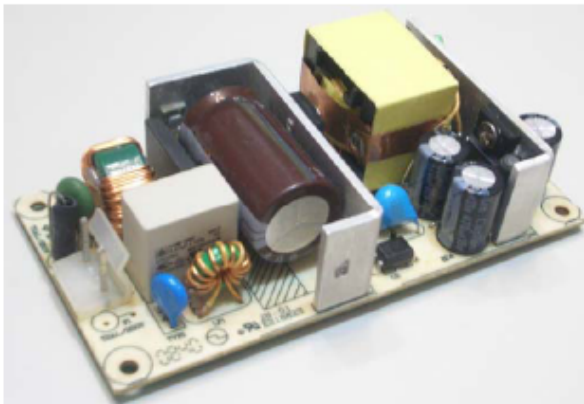


7. Products -- Open-Frame 80 W

- Model: PRO80 series
- Input: 100 ~ 240 V-ac, 50 / 60Hz
- AC-input plug type: Wafer 2-pins 7.92mm,
- Output: 12 ~ 48 V-dc , 7 A max, 80 W max,
- DC-output plug type: Wafer-6-pins 3.96mm,,
- DC-output cable: NA, or as customer specified,
- Safety: Comply UL, c-UL, GS, CE,
- Size: 76.2mm(L) * 127mm(W) * 35mm(H) , (3" * 5" * 1.4"),
- Features: Compact size power supply,
- Application: Printer, various,

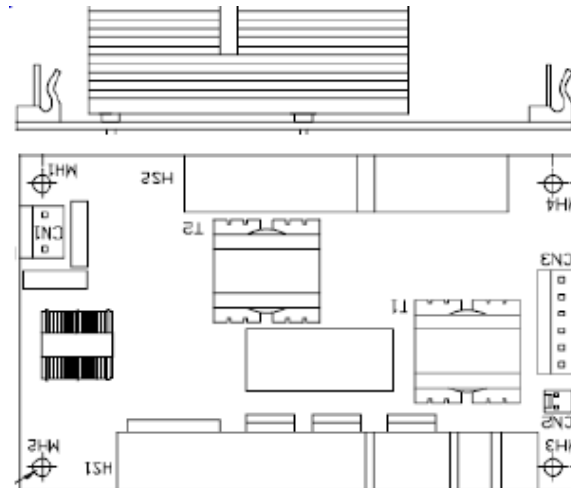


7. Products -- Open-Frame 100 W

- Model: PRO100 series
- Input: 100 ~ 240 V-ac, 50 / 60Hz
- AC-input plug type: Wafer 2-pins 7.92mm,
- Output: 5 ~ 48 V-dc , 20 A max, 100 W max,
- DC-output plug type: Wafer-6-pins 3.96mm,,
- DC-output cable: NA, or as customer specified,
- Safety: Comply UL, c-UL, GS, CE,
- Size: 76.2mm(L)*127mm(W)*35mm(H) , (3"*5"*1.4"),
- Features: Compact size power supply,
- Application: Printer, various,

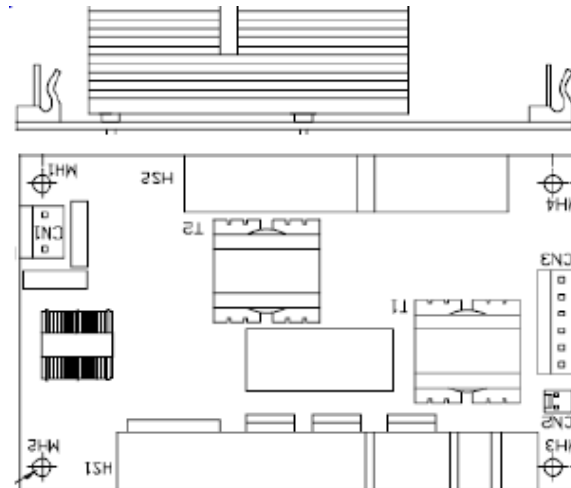


7. Products -- Open-Frame 120 W

- Model: PRO120 series
- Input: 100 ~ 240 V-ac, 50 / 60Hz
- AC-input plug type: Wafer 2-pins 7.92mm,
- Output: 12 ~ 48 V-dc , 10 A max, 120 W max,
- DC-output plug type: Wafer-6-pins 3.96mm,,
- DC-output cable: NA, or as customer specified,
- Safety: Comply UL, c-UL, GS, CE,
- Size: 76.2mm(L)*127mm(W)*35mm(H) , (3"*5"*1.4"),
- Features: Compact size power supply,
- Application: Printer, various,

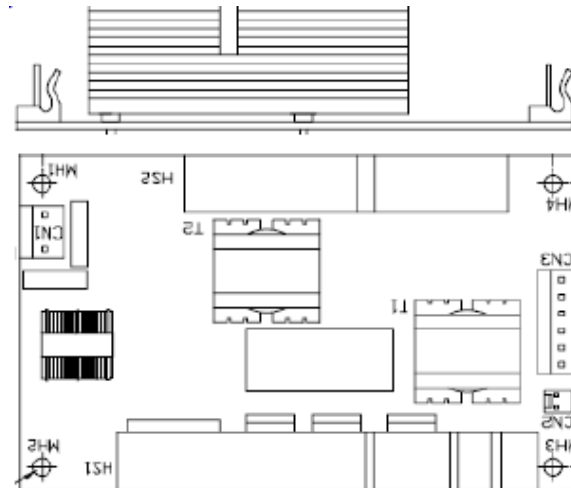



7. Products -- Open-Frame 130 W

- **Model: SPCO-130W series**
- **Input: 100 ~ 240 V-ac, 50 / 60Hz**
- **AC-input plug type: Wafer 2-pins 7.92mm,**
- **Output: 24 ~ 48 V-dc , 5.4 A max, 130 W max,**
- **DC-output plug type: Wafer-6-pins 3.96mm,,**
- **DC-output cable: NA, or as customer specified,**
- **Safety: Comply UL, c-UL, GS, CE,**
- **Size: 76.2mm(L)*127mm(W)*35mm(H) , (3"*5"*1.4"),**
- **Features: Compact size power supply,**
- **Application: Printer, various,**

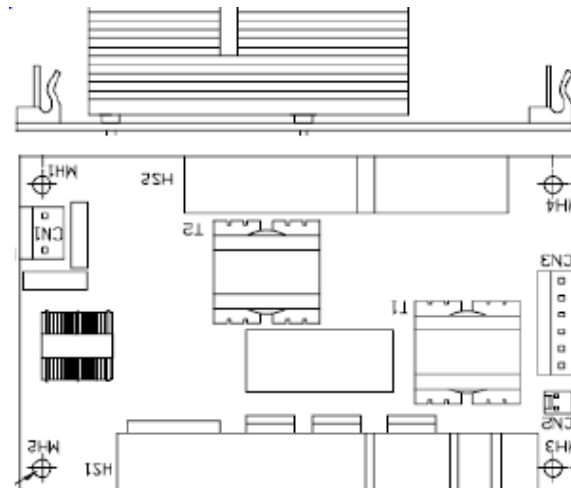



7. Products -- LED Driver 8-10 W

- Model: SPCO-8W / 10W series
- Input: 100 ~ 240 V-ac, 50 / 60Hz
- AC-input plug type: Wires,,
- Output: 18 ~ 22 V-dc , 500mA max, 10W max,
- DC-output plug type: Wires, 2-pins,,
- Safety: Comply UL, c-UL, GS, CE,
- Size: 63mm(L) * 25.5mm(W) * 18mm(H) (For T8),
- Features: high PF value, high Efficiency,
- Application: LED Lamp T8,

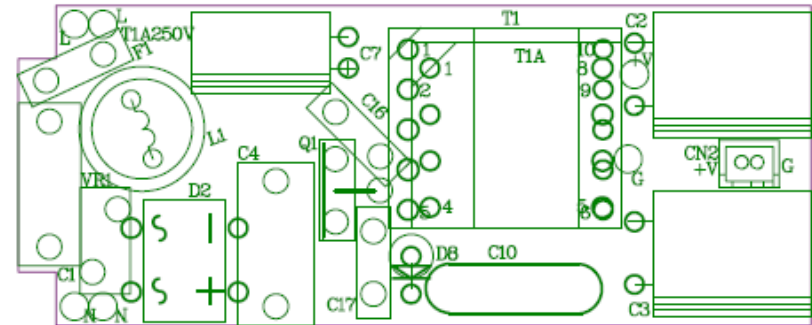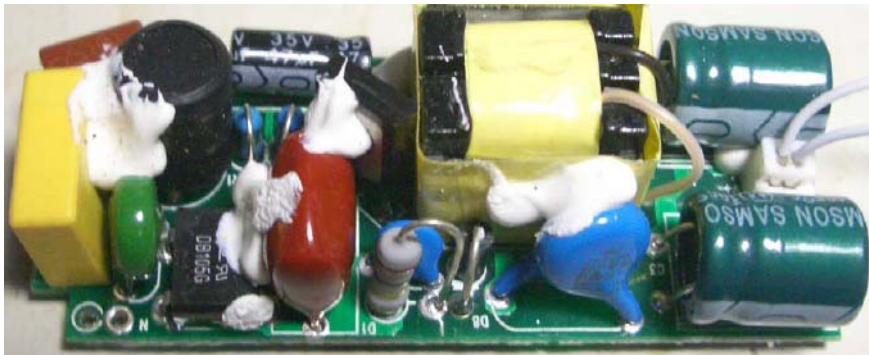


7. Products -- LED Driver 8-12 W

- Model: SPCO-10W / 12W series
- Input: 100 ~ 240 V-ac, 50 / 60Hz
- AC-input plug type: Wires,,
- Output: 18 ~ 22 V-dc , 600mA max, 12W max,
- DC-output plug type: Wires, 2-pins,,
- Safety: Comply UL, c-UL, GS, CE,
- Size: 69mm(L) * 25.5mm(W) * 18mm(H) (For T8),
- Features: high PF value, high Efficiency,
- Application: LED Lamp T8 (with Starter),

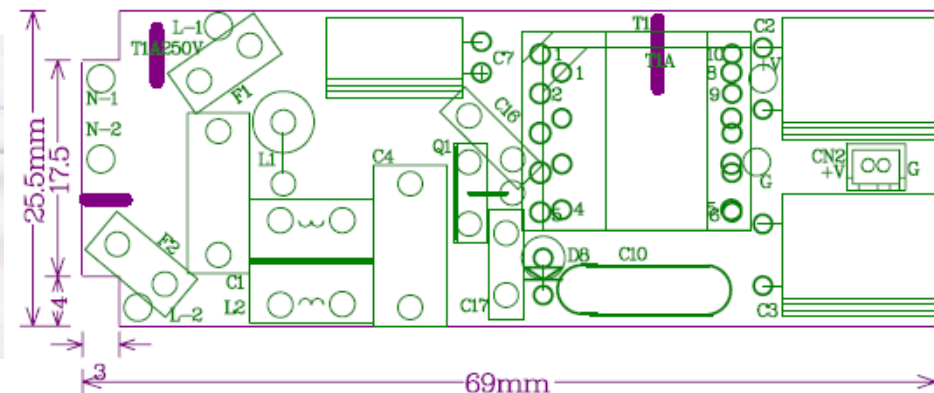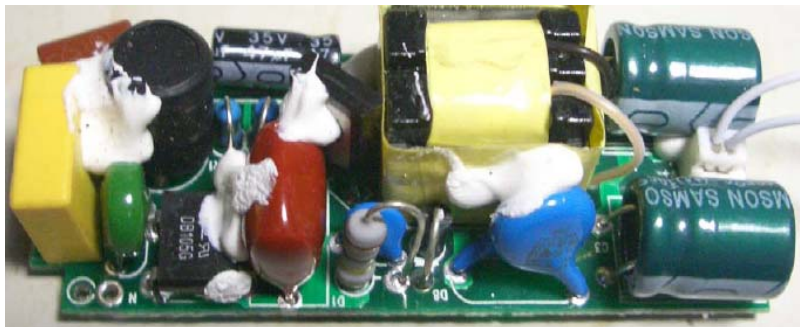

7. Products -- LED Driver 8 W

- **Model: SPCO-8WT8 series**
- **Input: 100 ~ 240 V-ac, 50 / 60Hz**
- **AC-input plug type: Wafer-2-pins, 4mm,**
- **Output: 18 ~ 26 V-dc , 350mA max, 8 W max,**
- **DC-output plug type: Wafer-2-pins, 2mm,,**
- **Safety: Comply UL, c-UL, GS, CE,**
- **Size: 225mm(L) * 21mm(W) * 10mm(H) (For T8),**
- **Features: high PF value, high Efficiency,**
- **Application: LED Lamp,**

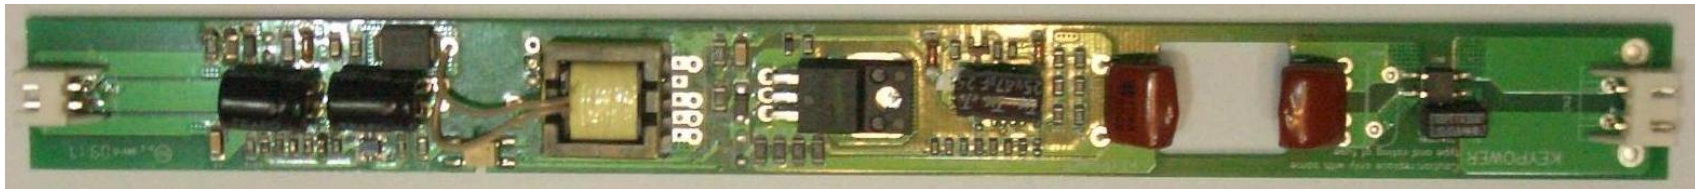



7. Products -- LED Driver 16 W

- **Model: SPCO-16WT8 series**
- **Input: 100 ~ 240 V-ac, 50 / 60Hz**
- **AC-input plug type: Wires-2-wires, (L,N)**
- **Output: 18 ~ 26 V-dc , 660mAmax, 16Wmax,**
- **DC-output plug type: Wires-2-wires,**
- **Safety: Comply UL, c-UL, GS, CE,**
- **Size: 285mm(L) * 21mm(W) * 10mm(H), (For T8)**
- **Features: high PF value, high Efficiency,**
- **Application: LED Lamp,**



7. Products -- LED Driver 20 W

- Model: SPCO-20WL series
- Input: 100 ~ 240 V-ac, 50 / 60Hz
- AC-input plug type: Wires-2-wires, (L,N)
- Output: 18 ~ 26 V-dc , 830mAmax, 20Wmax,
- DC-output plug type: Wires-2-wires,
- Safety: Comply UL, c-UL, GS, CE,
- Size: 91mm(L) * 25mm(W) * 20mm(H), (Board)
- 120mm(L) * 33mm(W) * 30mm(H), (Case)
- Features: high PF value, high Efficiency,
- Application: LED Lamp,

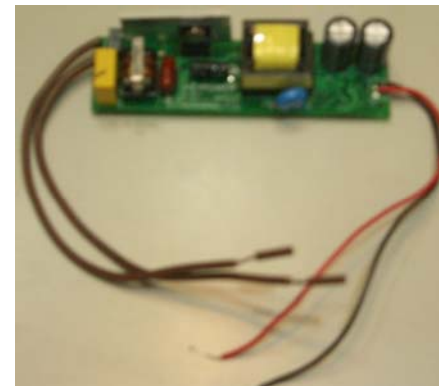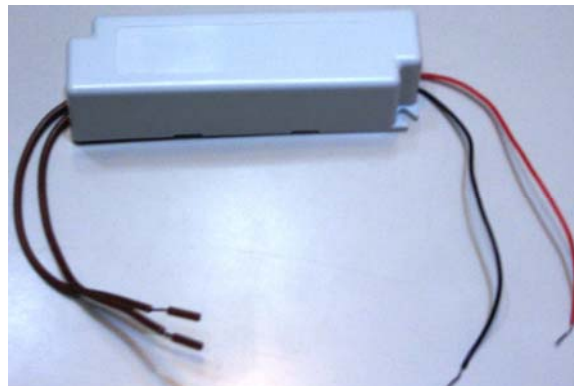

7. Products -- 1-U Power Supply - 130W

- Model: PRN130 series

Size: (O)(Open-Frame):150(L)*77(W)*38(H) ; (U)(U-Bracket):152(L)*80(W)*40(H) ; (M)(Case):177(L)*80(W)*40(H) ;

Model	+ 3.3 V	+ 5 V	+ 12 V	- 5 V	- 12 V	+ 5 Vsb	+ 24 V	+ 48 V	Safety	+5V & +3.3V
PRN130(O)(U)(M)A	15A	15A	8A	0.3A	1A	2A			UL,TUV,CE,CB	17A
PRN130(O)(U)(M)	15A	15A	8A		1A	2A			UL,TUV,CE,CB	17A
PRN130(O)(U)(M)-1		15A	8A		1A				UL,TUV,CE,CB	
PRN130(O)(U)(M)-2		15A	8A						UL,TUV,CE,CB	
PRN130(O)(U)(M)-3	15A	15A	8A		1A	2A			UL,TUV,CE,CB	17A
PRN130(O)(U)(M)-4		3.3V~5V 26A							UL,TUV,CE,CB	
PRN130(O)(U)(M)-5	26A	26A							UL,TUV,CE,CB	28A
PRN130(O)(U)(M)-6			12V~18V 11A/7.3A						UL,TUV,CE,CB	
PRN130(O)(U)(M)-7							24V~30V 6A/4.4A		UL,TUV,CE,CB	
PRN130(O)(U)(M)-8								32V~38V 4.1A/3.5A	UL,TUV,CE,CB	
PRN130(O)(U)(M)-9								45V~56V 3A/2.5A	UL,TUV,CE,CB	



7. Products -- 1-U Power Supply - 150W

- Model: PRN150 series

Size: (O)(Open-Frame):150(L)*77(W)*38(H) ; (U)(U-Bracket):152(L)*80(W)*40(H) ; (M)(Case):177(L)*80(W)*40(H) ;

Model	+ 3.3 V	+ 5 V	+ 12 V	- 5 V	- 12 V	+ 5 Vsb	+ 24 V	+ 48 V	Safety	+5V & +3.3V
PRN150(O)(U)(M)A	15A	15A	8A	0.3A	1A	2A			UL,TUV,CE,CB	17A
PRN150(O)(U)(M)	15A	15A	8A		1A	2A			UL,TUV,CE,CB	17A
PRN150(O)(U)(M)-1		15A	8A		1A				UL,TUV,CE,CB	
PRN150(O)(U)(M)-2		15A	8A						UL,TUV,CE,CB	
PRN150(O)(U)(M)-3	15A	15A	8A		1A	2A			UL,TUV,CE,CB	17A
PRN150(O)(U)(M)-4		3.3V~5V 30A							UL,TUV,CE,CB	
PRN150(O)(U)(M)-5	30A	30A							UL,TUV,CE,CB	28A
PRN150(O)(U)(M)-6			12V~18V 12.5A/8.5A						UL,TUV,CE,CB	
PRN150(O)(U)(M)-7							24V~30V 6.5A/5A		UL,TUV,CE,CB	
PRN150(O)(U)(M)-8								32V~38V 4.7A/4A	UL,TUV,CE,CB	
PRN150(O)(U)(M)-9								45V~56V 3.4A/3A	UL,TUV,CE,CB	



7. Products -- 1-U Power Supply - 200W

- Model: PRN200 series

Size: (O)(Open-Frame):150(L)*77(W)*38(H) ; (U)(U-Bracket):152(L)*80(W)*40(H) ; (M)(Case):177(L)*80(W)*40(H) ;

Model	+ 3.3 V	+ 5 V	+ 12 V	- 5 V	- 12 V	+ 5 Vsb	+ 24 V	+ 48 V	Safety	+5V & +3.3V
PRN200(O)(U)(M)A	20A	20A	8A	0.3A	1A	2A			UL,TUV,CE,CB	22A
PRN200(O)(U)(M)	20A	20A	8A		1A	2A			UL,TUV,CE,CB	22A
PRN200(O)(U)(M)-1		20A	8A		1A				UL,TUV,CE,CB	
PRN200(O)(U)(M)-2		20A	8A						UL,TUV,CE,CB	
PRN200(O)(U)(M)-3	20A	20A	8A		1A	2A	4A		UL,TUV,CE,CB	22A
PRN200(O)(U)(M)-4		3.3V~5V 40A							UL,TUV,CE,CB	
PRN200(O)(U)(M)-5	40A	40A							UL,TUV,CE,CB	42A
PRN200(O)(U)(M)-6			12V~18V 17A/11.5A						UL,TUV,CE,CB	
PRN200(O)(U)(M)-7							24V~30V 9A/7A		UL,TUV,CE,CB	
PRN200(O)(U)(M)-8								32V~38V 6.5A/5.5A	UL,TUV,CE,CB	
PRN200(O)(U)(M)-9								45V~56V 4.5A/3.6A	UL,TUV,CE,CB	



7. Products -- 1-U Power Supply - 250W

- Model: PRN250 series

Size: (O)(Open-Frame):150(L)*77(W)*38(H) ; (U)(U-Bracket):152(L)*80(W)*40(H) ; (M)(Case):177(L)*80(W)*40(H) ;

Model	+ 3.3 V	+ 5 V	+ 12 V	- 5 V	- 12 V	+ 5 Vsb	+ 24 V	+ 48 V	Safety	+5V & +3.3V
PRN250(O)(U)(M)A	20A	25A	14A	0.3A	1A	2A			UL,TUV,CE,CB	27A
PRN250(O)(U)(M)	20A	25A	14A		1A	2A			UL,TUV,CE,CB	27A
PRN250(O)(U)(M)-1		25A	14A		1A				UL,TUV,CE,CB	
PRN250(O)(U)(M)-2		25A	16A						UL,TUV,CE,CB	



7. Products -- 1-U Power Supply - 300W

- Model: PRN300 series

Size: (O)(Open-Frame):150(L)*77(W)*38(H) ; (U)(U-Bracket):152(L)*80(W)*40(H) ; (M)(Case):197(L)*80(W)*40(H) ;

Model	+ 3.3 V	+ 5 V	+ 12 V	- 5 V	- 12 V	+ 5 Vsb	+ 24 V	+ 48 V	Safety	+5V & +3.3V
PRN300(O)(U)(M)A	18A	30A	16A	0.3A	1A	2A			UL,TUV,CE,CB	32A
PRN300(O)(U)(M)	18A	30A	16A		1A	2A			UL,TUV,CE,CB	32A
PRN300(O)(U)(M)-1		30A	16A		1A				UL,TUV,CE,CB	
PRN300(O)(U)(M)-2		30A	25A						UL,TUV,CE,CB	
PRN300(O)(U)(M)-3	22A	30A	16A		1A	2A	6A		UL,TUV,CE,CB	32A
PRN300(O)(U)(M)-4		3.3V~5V 60A							UL,TUV,CE,CB	
PRN300(O)(U)(M)-5	30A	50A							UL,TUV,CE,CB	52A
PRN300(O)(U)(M)-6			12V~18V 25A/17A						UL,TUV,CE,CB	
PRN300(O)(U)(M)-7							24V~30V 12.5A/10A		UL,TUV,CE,CB	
PRN300(O)(U)(M)-8								32V~38V 9.4A/8A	UL,TUV,CE,CB	
PRN300(O)(U)(M)-9								45V~56V 7A/5.5A	UL,TUV,CE,CB	



7. Products -- 1U & 2U Power Supply - 350W

- Model: PRN350 series

Size: (M)(Case):197(L)*80(W)*40(H) ; (L)(Case):240(L)*80(W)*40(H) ; (H)(2-U-Case):197(L)*80(W)*80(H) ;

Model	+ 3.3 V	+ 5 V	+ 12 V	- 5 V	- 12 V	+ 5 Vsb	+ 24 V	+ 48 V	Safety	+5V & +3.3V
PRN320L	28A	30A	22A		3A	2A			UL,TUV,CE,CB	32A
PRN350MA	22A	30A	22A	0.3A	1A	2A			UL,TUV,CE,CB	35A
PRN350M	22A	30A	22A		1A	2A			UL,TUV,CE,CB	35A
PRN350M-1		30A	22A		1A	2A			UL,TUV,CE,CB	
PRN350HA	22A	30A	22A	0.3A	1A	2A			UL,TUV,CE,CB	35A
PRN350H	22A	30A	22A		1A	2A	6A		UL,TUV,CE,CB	35A



7. Products -- 1U & 2U Power Supply - 400W

- Model: PRN400 series

Size: (M)(Case):197(L)*80(W)*40(H) ; (L)(Case):240(L)*80(W)*40(H) ; (H)(2-U-Case):197(L)*80(W)*80(H) ;

Model	+ 3.3 V	+ 5 V	+ 12 V	- 5 V	- 12 V	+ 5 Vsb	+ 24 V	+ 48 V	Safety	+5V & +3.3V
PRN400HA	28A	35A	27A	0.3A	1A	2A			UL,TUV,CE,CB	38A
PRN400H	28A	35A	27A		1A	2A			UL,TUV,CE,CB	38A
PRN400MA	28A	35A	27A	0.3A	1A	2A			UL,TUV,CE,CB	38A
PRN400M	28A	35A	27A		1A	2A			UL,TUV,CE,CB	38A
PRN400M-1		35A	27A		1A				UL,TUV,CE,CB	
PRN400M-2		35A	27A						UL,TUV,CE,CB	
PRN400M-3	27A	28A	24A		1A	2A	6A		UL,TUV,CE,CB	38A
PRN400M-6			12V~18V 33.4A/22.3A						UL,TUV,CE,CB	
PRN400M-7							24V~30V 16.7A/13.4A		UL,TUV,CE,CB	
PRN400M-8								32V~38V 12.5A/10.5A	UL,TUV,CE,CB	
PRN400M-9								45V~56V 9A/7.2A	UL,TUV,CE,CB	



7. Products -- ATX Power Supply - 250W~320W

- Model: PRM250 & PRM320 series

Size: (M)(Case):150(W)*86(H)*140(D)

Model	+ 3.3 V	+ 5 V	+ 12 V	- 5 V	- 12 V	+ 5 Vsb	+ 24 V	+ 48 V	Safety	Total Power	+5V & +3.3V
PRM250	15A	25A	9A	1A	1A	1~2A			UL,TUV,CE,CCC,CB	250W	25A
PRM250-1		25A	9A	1A	1A				UL,TUV,CE,CCC,CB	250W	
PRM250-2		12A	14A		1A				UL,TUV,CE,CCC,CB	250W	
PRM320	20A	32A	11A	1A	1A	1~2A			UL,TUV,CE,CCC,CB	320W	38A
PRM320-1		32A	11A	1A	1A				UL,TUV,CE,CCC,CB	320W	
PRM320-2		14A	20A						UL,TUV,CE,CCC,CB	320W	
PRM320-3	20A	32A	11A	1A	1A	1~2A	4A		UL,TUV,CE,CCC,CB	320W	38A
PRM320-4			26A							320W	
PRM320-5							13A			320W	
PRM320-6								6.6A		320W	
PRM321	30A	32A	20A	1A	1~3A	1~2A			UL,TUV,CE,CCC,CB	320W	32A



7. Products -- ATX Power Supply - 400W~560W

- Model: PRM400 & PRM500 & PRM560 series

Size: (M)(Case):150(W)*86(H)*140(D)

Model	+ 3.3 V	+ 5 V	+ 12 V	- 5 V	- 12 V	+ 5 Vsb	+ 24 V	+ 48 V	Safety	Total Power	+5V & +3.3V
PRM400	20A	42A	14A	1A	1A	1~2 A			UL,TUV,CE,CCC,CB	400W	42A
PRM400-1		42A	14A	1A	1A				UL,TUV,CE,CCC,CB	400W	
PRM400-2		20A	27A						UL,TUV,CE,CCC,CB	400W	
PRM400-3	20A	42A	10A	1A	1A	1~2 A	4A		UL,TUV,CE,CCC,CB	400W	42A
PRM400-15		42A	+15V 14A	1A	-15V 1A				UL,TUV,CE,CCC,CB	400W	
PRM401	30A	50A	27A	1A	1~3 A	1~2 A			UL,TUV,CE,CCC,CB	400W	50A
PRM401-1		50A	27A	1A	1~3 A				UL,TUV,CE,CCC,CB	400W	
PRM401-2		50A	27A						UL,TUV,CE,CCC,CB	400W	
PRM401-3	30A	50A	27A	1A	1~3 A	1~2 A	4A		UL,TUV,CE,CCC,CB	400W	50A
PRM403	30A	40A	32A	1A	1~3 A	2A			UL,TUV,CE,CCC,CB	400W	50A
PRM460	35A	40A	32A	1A	1~3 A	2A			UL,TUV,CE,CCC,CB	460W	55A
PRM500	40A	50A	32A	1A	1~3 A	2A			UL,TUV,CE,CCC,CB	500W	50A
PRM500-1		50A	32A	1A	1~3 A				UL,TUV,CE,CCC,CB	500W	
PRM500-2		50A	32A						UL,TUV,CE,CCC,CB	500W	
PRM560	40A	60A	32A	1A	1~3 A	2A			UL,TUV,CE,CCC,CB	560W	60A
PRM560-1		60A	32A	1A	1~3 A	2A			UL,TUV,CE,CCC,CB	560W	
PRM560-2		60A	32A						UL,TUV,CE,CCC,CB	560W	
PRM560-5		80A								400W	
PRM560-6			46A							560W	
PRM560-7							23A			560W	
PRM560-8								11A		560W	



7. Products -- Redundant Power – 1U~4U - 170W~1000W

- Model: PRA170SV ~ PRA1000RV

Model No.	+ 5V	+ 3.3V	+ 12V	-5V	-12V	+ 5VSB	SAFETY	Total Power	+5V & +3.3V	Spec (Dimension)
PRA170SV(H)	15A	15A	6A	1A	1A	2A	UL TUV CB CE	170W	15A	286(W) * 43.8(H) * 226.5(D)
PRA230SV(H)	25A	15A	9A	1A	1A	2A	UL TUV CB CE	230W	25A	105(W) * 85.3(H) * 234.5(D)
PRA300RV(H)	25~30A	16~22A	11~15A	1A	1A	2A	UL TUV CB CE	300W	32A	RV: 105(W) * 85.3(H) * 234.5(D)
PRA300RV(H)-1	25~30A		11~15A	1A	1A		UL TUV CB CE	300W		RV-1: 105(W) * 85.3(H) * 242.5(D)
PRA300RV(H)-2	30A		11A			2A	UL TUV CB CE	300W		105(W) * 85.3(H) * 242.5(D)
PRA350RV(H)	25~30A	28A	18~24A	1A	1A	2A	UL TUV CB CE	350W	32A	RV-1: 105(W) * 85.3(H) * 242.5(D)
PRA350RV(H)-1	25~30A		18~24A	1A	1A		UL TUV CB CE	350W		RV-1: 105(W) * 85.3(H) * 243.5(D)
PRA350RV(H)-2	25A		24A				UL TUV CB CE	350W		RV-1: 105(W) * 85.3(H) * 243.5(D)
PRA560RV(H)	58A	40A	20A	1.5A	1.5A	2.5A	UL TUV CB CE	560W	58A	RV-1: 105(W) * 128.9(H) * 234.5(D)
PRA560RV(H)-1	58A		20A	1.5A	1.5A		UL TUV CB CE	560W		RV-1: 105(W) * 128.9(H) * 234.5(D)
PRA650RV(H)	58A	45A	36A	1.5A	1.5A	2.5A	UL TUV CB CE	650W	60A	RV-1: 105(W) * 128.9(H) * 234.5(D)
PRA650RV(H)-1	58A		30A	1.5A	1.5A		UL TUV CB CE	650W		RV-1: 105(W) * 128.9(H) * 234.5(D)
PRA840RV	86A	58A	30A	2A	2A	3A	UL TUV CB CE	840W	86A	RV-1: 105(W) * 171.5(H) * 234.5(D)
PRA1000RV	86A	64A	54A	2A	2A	3A	UL TUV CB CE	1000W	90A	RV-1: 105(W) * 171.5(H) * 234.5(D)



7. Products -- Redundant Power – 1U~4U - 170W~1000W

- Model: PRA170MV ~ PRA1000MV

Dimension: 2U=167(W) * 86(H) * 183(D) ; 3U=167(W) * 128.5(H) * 183(D) ; 4U=169.5(W) * 171(H) * 183(D) ;

Model No.	+ 5V	+ 3.3V	+ 12V	-5V	-12V	+ 5VSB	SAFETY	Total Power	+5V & +3.3V Output	Spec
PRA170MV	15A	15A	6A	1A	1A	2A	UL TUV CB CE CCC	170W	15A	

PRA230MV	25A	15A	9A	1A	1A	2A	UL TUV CB CE CCC	230W	25A	
----------	-----	-----	----	----	----	----	------------------	------	-----	--

PRA300MV	25~30A	16~22A	11~15A	1A	1A	2A	UL TUV CB CE CCC	300W	32A	
PRA300MV-1	25~30A		11~15A	1A	1A		UL TUV CB CE CCC	300W		
PRA300MV-2	30A		11A			2A	UL TUV CB CE CCC	300W		

PRA350MV	25~30A	28A	18~24A	1A	1A	2A	UL TUV CB CE CCC	350W	32A	
PRA350MV-1	25~30A		18~24A	1A	1A		UL TUV CB CE CCC	350W		
PRA350MV-2	25A		24A			2A	UL TUV CB CE CCC	350W		

PRA560MV	58A	40A	20A	1.5A	1.5A	2.5A	UL TUV CB CE CCC	560W	58A	
PRA560MV-1	58A		20A	1.5A	1.5A		UL TUV CB CE CCC	560W		

PRA650MV	58A	45A	36A	1.5A	1.5A	2.5A	UL TUV CB CE CCC	650W	60A	
PRA650MV-1	58A		36A	1.5A	1.5A		UL TUV CB CE CCC	650W		

PRA840MV	86A	58A	30A	2A	2A	3A	UL TUV CB CE CCC	840W	86A	
----------	-----	-----	-----	----	----	----	------------------	------	-----	--

PRA1000MV	86A	64A	54A	2A	2A	3A	UL TUV CB CE CCC	1000W	90A	
-----------	-----	-----	-----	----	----	----	------------------	-------	-----	--



7. Products -- Redundant Power – 2U - 250W~500W

- Model: PRR250 ~ PRR500

Dimension: Horizontal=356(W) * 99(H) * 183(D) ; Vertical=169(W) * 177(H) * 183(D) ;

Model No.	+ 5V	+ 3.3V	+ 12V	-5V	-12V	+ 5VSB	SAFETY	Total Power	+5V & +3.3V Output
PRR250V(H)	25A	15A	9A	1A	1A	1~2A	UL TUV CB CE CCC	250W	25A
PRR250V(H)-1	25A		9A	1A	1A		UL TUV CB CE CCC	250W	

PRR320V(H)	32A	20A	11A	1A	1A	1~2A	UL TUV CB CE CCC	320W	32A
PRR320V(H)-1	32A		11A	1A	1A		UL TUV CB CE CCC	320W	
PRR320V(H)-2	14A		21A				UL TUV CB CE CCC	320W	

PRR400V(H)	42A	20A	14A	1A	1A	1~2A	UL TUV CB CE CCC	400W	42A
PRR400V(H)-1	42A		14A	1A	1A		UL TUV CB CE CCC	400W	
PRR400V(H)-2	21A		27A				UL TUV CB CE CCC	400W	

PRR401V(H)	50A	30A	27A	1A	1~3A	1~2A	UL TUV CB CE CCC	400W	50A
PRR401V(H)-1	50A		27A	1A	1~3A		UL TUV CB CE CCC	400W	

PRR500V(H)	50A	40A	32A	1A	1~3A	1~2A	UL TUV CB CE CCC	500W	50A
PRR500V(H)-1	50A		32A	1A	1~3A		UL TUV CB CE CCC	500W	
PRR500V(H)-2	50A		32A	1A			UL TUV CB CE CCC	500W	



7. Products -- Redundant Power – 1U - 325W~750W

- Model: PRT3251U ~ PRT7501U

1U Single/Horizontal Redundant Series 1+1,2+1 (PRTxx1U-Sx / PRTxx1U-Hx)

MODEL NO.	+5V	+3.3V	+12V	-12V	+5VSB	Total Power	+5V&+3.3V Output
PRT3251U-S5	26A	18A	20A	0.5A	3A	325W	26A
PRT3251U-S2	26A		20A			325W	
PRT3501U-S5	32A	20A	23A	0.5A	3A	350W	33A
PRT3751U-S5	32A	20A	26A	0.5A	3A	375W	33A
PRT4001U-S5	32A	20A	26A	0.5A	3A	400W	33A
PRT4001U-S2	32A		26A			400W	
PRT3251U-H5	26A	18A	20A	0.5A	3A	325W	26A
PRT3251U-H2	26A		20A			325W	
PRT3501U-H5	32A	20A	23A	0.5A	3A	350W	33A
PRT4001U-H5	32A	20A	26A	0.5A	3A	400W	33A
PRT4001U-H2	32A		26A			400W	
PRT6001U-H5	50A	36A	40A	0.5A	3A	600W	65A
PRT6001U-H2	50A		40A			600W	
PRT6501U-H5	50A	38A	46A	0.5A	3A	650W	65A
PRT7001U-H5	50A	40A	52A	0.5A	3A	700W	65A
PRT7501U-H2	60A		52A			750W	
PRT7501U-H5	50A	40A	52A	0.5A	3A	750W	65A



7. Products -- DC-Input Power Supply – 1U - 170W~300W

- Model: PSD170 ~ PSD300

DC Input : -38VDC ~ -72VDC / 20VDC ~ 32VDC

Dimension: PSD170/230=100(W) * 40.6(H) * 205(D) ; PSD300=100(W) * 40.6(H) * 218.25(D)

Model No.	+ 5V	+ 3.3V	+ 12V	-5V	-12V	+5VSB	SAFETY	Total Power	+5V & +3.3V Output
PSD170D	15A	15A	6A	1A	1A	1.5A	UL TUV CB CE	170W	15A
PSD170D-1	15A		6A	1A	1A		UL TUV CB CE	170W	

PSD230D	25A	15A	9A	1A	1A	1.5A	UL TUV CB CE	230W	25A
PSD230D-1	25A		9A	1A	1A		UL TUV CB CE	230W	

PSD300G	30A	22A	11A	1A	1A	1.5A	UL TUV CB CE	300W	30A
PSD300G-1	30A		11A	1A	1A		UL TUV CB CE	300W	
PSD300H	30A	22A	11A	1A	1A	1.5A	UL TUV CB CE	300W	30A

PSD170D-A	15A	15A	6A	1A	1A	0.75A		170W	15A
PSD170D-1A	15A		6A	1A	1A			170W	

PSD230D-A	25A	15A	9A	1A	1A	0.75A		230W	25A
PSD230D-1A	25A		9A	1A	1A			230W	



7. Products -- DC-Input Power Supply - ATX - 250W~400W

- Model: PRMD250 ~ PRMD400

DC INPUT : -36VDC ~ -72VDC / 20VDC ~ 32VDC

Dimension : 150(W) * 86(H) * 140(D)

Model No.	+ 5V	+ 3.3V	+ 12V	-5V	-12V	+ 5VSB	SAFETY	Total Power	+5V & +3.3V
PRMD250	25A	15A	14A	1A	1~3A	1A	UL TUV CB CE	250W	125W
PRMD250-1	25A		14A	1A	1~3A		UL TUV CB CE	250W	
PRMD250-2	25A		14A				UL TUV CB CE	250W	

PRMD320	32A	20A	20A	1A	1~3A	1A	UL TUV CB CE	320W	160W
PRMD320-1	32A		20A	1A	1~3A		UL TUV CB CE	320W	
PRMD320-2	32A		20A				UL TUV CB CE	320W	

PRMD400	42A	20A	14A	1A	1~3A	1A	UL TUV CB CE	400W	210W
PRMD400-1	42A		14A	1A	1~3A		UL TUV CB CE	400W	
PRMD400-2	42A		14A				UL TUV CB CE	400W	

PRMD401	50A	30A	27A	1A	1~3A	1A	UL TUV CB CE	400W	250W
PRMD401-1	50A		27A	1A	1~3A		UL TUV CB CE	400W	
PRMD401-2	50A		27A				UL TUV CB CE	400W	

PRMD250 A	25A	15A	14A	1A	1A	0.75A		250W	125W
PRMD250-1 A	25A		14A	1A	1A			250W	
PRMD250-2 A	25A		14A					250W	

PRMD320 A	32A	20A	20A	1A	1A	0.75A		320W	160W
PRMD320-1 A	32A		20A	1A	1A			320W	
PRMD320-2 A	32A		20A					320W	



7. Products -- DC-Input Redundant Power -- 170W~840W

- Model: PRD170MV ~ PRD840MV

DC-INPUT = -38VDC ~ -72VDC / 20VDC ~ 32VDC

Dimension: 2U=167(W)*86(H)*183(D) ; 3U=167(W)*128.5(H)*183(D) ; 4U=167(W)*171(H)*183(D)

Model No.	+ 5V	+ 3.3V	+ 12V	-5V	-12V	+ 5VSB	SAFETY	Total Power	+5V & +3.3V
PRD170MV	15A	15A	1A	1A	1A	1.5A	UL TUV CB CE	170W	15A
PRD170MV-1	15A		6A	1A	1A		UL TUV CB CE	170W	

PRD230MV	25A	15A	9A	1A	1A	1.5A	UL TUV CB CE	230W	25A
PRD230MV-1	25A		9A	1A	1A		UL TUV CB CE	230W	


PRD300MV	30A	22A	11A	1A	1A	1.5A	UL TUV CB CE	300W	30A
PRD300MV-1	30A		11A	1A	1A		UL TUV CB CE	300W	

PRD560MV	58A	40A	20A	1.5A	1.5A	2.5A	UL TUV CB CE	560W	58A
PRD560MV-1	58A		20A	1.5A	1.5A		UL TUV CB CE	560W	

PRD840MV	86A	58A	30A	2A	2A	3A	UL TUV CB CE	840W	86A
PRD840MV-1	86A		30A	2A	2A		UL TUV CB CE	840W	

PRD170MV-A	15A	15A	6A	1A	1A	0.75A			15A
PRD170MV-1A	15A		6A	1A	1A				

PRD230MV-A	25A	15A	9A	1A	1A	0.75A			25A
PRD230MV-1A	25A		9A	1A	1A				

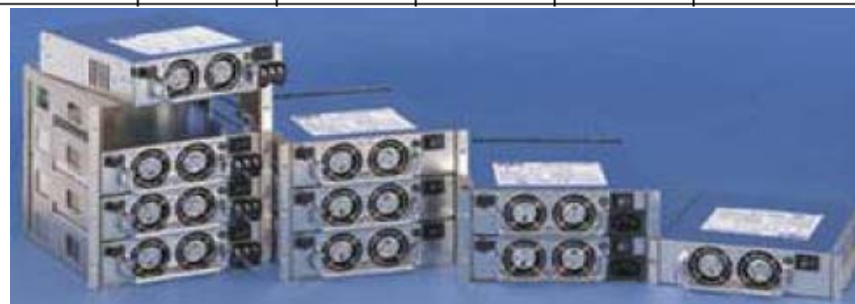

7. Products -- DC-Input Redundant Power -- 170W~840W

- Model: PRD170RV ~ PRD840RV

DC-INPUT = -38VDC ~ -72VDC / 20VDC ~ 32VDC

Dimension: 2U=105(W)*85.3(H)*234.5(D);3U=105(W)*128.9(H)*234.5(D);4U=105(W)*171.5(H)*234.5(D)

Model No.	+ 5V	+ 3.3V	+ 12V	-5V	-12V	+ 5VSB	SAFETY	Total Power	+5V & +3.3V Output
PRD170RV	15A	15A	6A	1A	1A	1.5A	UL TUV CB CE	170W	15A
PRD170RV-1	15A		6A	1A	1A		UL TUV CB CE	170W	

PRD230RV	25A	15A	9A	1A	1A	1.5A	UL TUV CB CE	230W	25A
PRD230RV-1	25A		9A	1A	1A		UL TUV CB CE	230W	

PRD300RV	30A	22A	11A	1A	1A	1.5A	UL TUV CB CE	300W	30A
PRD300RV-1	30A		11A	1A	1A		UL TUV CB CE	300W	

PRD560RV	58A	40A	20A	1.5A	1.5A	2.5A	UL TUV CB CE	560W	58A
PRD560RV-1	58A		20A	1.5A	1.5A		UL TUV CB CE	560W	

PRD840RV	86A	58A	30A	2A	2A	3A	UL TUV CB CE	840W	86A
PRD840RV-1	86A		30A	2A	2A		UL TUV CB CE	840W	

PRD170RV-A	15A	15A	6A	1A	1A	1.5A		170W	15A
PRD170RV-1A	15A		6A	1A	1A			170W	

PRD230RV-A	25A	15A	9A	1A	1A	1.5A		230W	25A
PRD230RV-1A	25A		9A	1A	1A			230W	



7. Products -- DC-Input Redundant Power -- 250W~400W

- Model: PRRD250 ~ PRRD400

DC-INPUT = -38VDC ~ -72VDC / 20VDC ~ 32VDC

Dimension: Horizontal=356(W)*99(H)*183(D) ; Vertical=169.5(W)*177(H)*183(D)

Model No.	+ 5V	+ 3.3V	+ 12V	-5V	-12V	+ 5VSB	SAFETY	Total Power	+5V & +3.3V Output
PRRD250V(H)	25A	15A	14A	1A	1~3A	1A	UL TUV CB CE	250W	25A
PRRD250V(H)-1	25A		14A	1A	1~3A		UL TUV CB CE	250W	

PRRD320V(H)	32A	20A	20A	1A	1~3A	1A	UL TUV CB CE	320W	32A
PRRD320V(H)-1	32A		20A	1A	1~3A		UL TUV CB CE	320W	

PRRD400V(H)	42A	20A	14A	1A	1~3A	1A	UL TUV CB CE	400W	42A
PRRD400V(H)-1	42A		14A	1A	1~3A		UL TUV CB CE	400W	

PRRD401V(H)	50A	30A	27A	1A	1~3A	1A	UL TUV CB CE	400W	50A
PRRD401V(H)-1	50A		27A	1A	1~3A		UL TUV CB CE	400W	

PRRD250V(H)-A	25A	15A	14A	1A	1A	0.75A		250W	25A
PRRD250V(H)-1A	25A		14A	1A	1A			250W	

PRRD320V(H)-A	32A	20A	20A	1A	1A	0.75A		320W	32A
PRRD320V(H)-1A	32A		20A	1A	1A			320W	



Sky Power Co., Ltd.

Thank You

We're confident that
our capabilities are able to
support your
business requirements